

SPECIFICATIONS

HL940A

Powered By Cummins Performance Series Engine



*Photo may include optional equipment.



Net Power

154 HP (115 kW) at 2,200 rpm

Operating Weight

13,601 kg (29,985 lb) -
13,862 kg (30,560 lb)

Standard Bucket

2.3 m³ (3.0 yd³) -
2.0 m³ (2.62 yd³)



HYUNDAI
CONSTRUCTION EQUIPMENT

SPECIFICATIONS HL940A

ENGINE	
Maker / Model	CUMMINS / B6.7
Type	Tier 4F/ Stage V Emission Certified, 6 cylinder diesel engine with No Manual Regeneration.
Gross Power (SAE J1995)	156 HP (116 kW) at 2,200 rpm
Net Power (SAE J1349)	154 HP (115 kW) at 2,200 rpm
Max. Power	165 HP (123 kW) at 1,800 rpm
Peak Gross Torque (SAE J1995)	550 lbft (746 N-m) at 1,300 rpm
Displacement	6.7 L (408 cu in)

*Stage V & Tier 4 Final Certified

TRANSMISSION	
Torque Converter Type	3-Elements, Single-stage, Single phase
Tire	20.5 R25, ★★, L3
Travel Speed, km/h (mph)	4 speed T/M
Forward	1st 7.0 (4.3)
	2nd 12.8 (7.9)
	3rd 25.1 (15.6)
	4th 40.0 (24.9)
Reverse	1st 7.4 (4.6)
	2nd 13.5 (8.4)
	3rd 26.4 (16.4)

AXLES	
Drive System	Four-wheel drive system
Mount	Rigid front axle and oscillating rear axle
Rear Axle Oscillation	Oscillating ±11 ° degrees
Hub Reduction	Planetary reduction at wheel end
Differential	Conventional
Reduction Ratio	21.533

HYDRAULIC SYSTEM	
Type	Load sensing hydraulic system
Pump	Variable displacement piston pump, 39.3 gpm
Control Valve	2 spool (Bucket, Boom) 3 spool (Bucket, Boom, Aux)
System Pressure	4,061 psi (280 bar)
Lift Circuit	The valve has four functions: raise, hold, lower and float can adjust automatic kickout from horizontal to full lift.
Tilt Circuit	The valve has three functions : tilt back, hold and dump. Can adjust automatic bucket positioner to desired load angle.
Cylinder	Type : Double acting
	No. of cylinders-bore x stroke:
	Lift 2-110 × 738 mm (4.3" × 29")
	HL940A Tilt 125 × 560 mm (4.9" × 1' 10")
HL940A XT Tilt	125 × 580 mm (4.9" × 1' 11")
Cycle Time	Raise: 5.5 sec, Dump: 1.9 sec Lower: 3.9 sec, Total: 11.3 sec

* Hyundai Bio Hydraulic Oil (HBHO) optional.

OVERVIEW		
Description	HL940A	HL940A XT
Operating Weight	13,601 kg (29,985 lb)	13,862 kg (30,560 lb)
Bucket Capacity	Heaped	2.3 m³ (3.0 yd³)
	Struck	2.0 m³ (2.62 yd³)
Breakout Force-Bucket	11,800 kg (26,015 lb)	11,940 kg (26,325 lb)
Tipping Load	Straight	10,471 kg (23,085 lb)
	Full Turn	9,003 kg (19,850 lb)
		8,150 kg (17,970 lb)
		7,050 kg (15,545 lb)

TIRES	
Type	Tubeless, loader design tires
Standard	20.5 R25, ★★, L3
Options Include	20.5-25 16PR L3
	20.5-25 16PR L5
	20.5 R25, ★, XHA

BRAKES	
Service Brakes	Hydraulically actuated, wet disc brakes actuate all 4 wheels independent axle-by-axle system. Self adjusting & wheel speed brake.
Parking Brake	Spring-applied, hydraulically released brake
Emergency Brake	When brake oil pressure drops, indicator light alerts operator and parking brake automatically applies.

STEERING SYSTEM	
Type	Load sensing hydrostatic articulated steering
Pump	Variable displacement piston pump, 149 lpm
System Pressure	210 bar (3,046 psi)
Cylinder	Double acting 2-65 × 429 mm (2.5" × 16.9")
Steering Angle	40° to both right and left angle, respectively
Features	Center-point frame articulation. Tilt and telescopic steering column.

SERVICE REFILL CAPACITIES	
Fuel Tank	220.0 liters (58 US gal)
Def Tank	30.1 liters (8.0 US gal)
Cooling System	37.0 liters (9.8 US gal)
Crankcase	18.0 liters (4.8 US gal)
Transmission	34.7 liters (9.2 US gal)
Front Axle	23.0 liters (6.1 US gal)
Rear Axle	23.0 liters (6.1 US gal)
Hydraulic Tank	90.0 liters (23.8 US gal)
Hydraulic System (Including Tank)	130.0 liters (34.3 US gal)

CABIN
ROPS / FOPS Cabin Meet ISO 3471 and ISO 3449


CAB NOISE LEVEL
Guaranteed noise level presented below can be differed depending on a range of factors such as operating condition, speed of a cooling fan, types of engine and so forth. Hearing protection shall be necessary if an operator is working in the improperly maintained cabin or exposed to a noisy environment by leaving doors and/or windows open.

With cooling fan speed at maximum value:	
Operator sound pressure level (ISO 6396:2008)	68 dB(A)
Exterior sound power level (ISO 6395:2008)	108 dB(A)

* Distance of 15 m (49.2 ft), moving forward in second gear ratio.

HL940A DIMENSIONS

All dimensions are approximate.

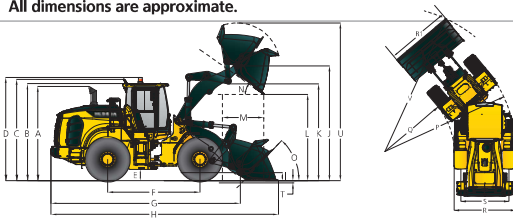

Description	HL940A	HL940A XT
A Height to Top of Exhaust Pipe	3,310 (10' 10")	3,310 (10' 10")
B Height to Top of Cabin	3,300 (10' 10")	3,300 (10' 10")
C Height to Top of Product Link Antenna	3,445 (11' 4")	3,445 (11' 4")
D Height to Top of Warning Beacon	3,430 (11' 3")	3,430 (11' 3")
E Ground Clearance	417 (1' 4.4")	417 (1' 4.4")
F Wheelbase	3,000 (9' 10")	3,000 (9' 10")
G Overall Length (Without Bucket)	6,430 (21' 1")	7,020 (23')
H Shipping Length (With Bucket Level on Ground)	7,600 (24' 11")	8,190 (26' 10")
I Hinge Pin Height at Carry Position	430 (1' 5")	600 (1' 12")
J Hinge Pin Height at Maximum Lift	3,820 (12' 6")	4,425 (14' 6")

Description		HL940A	HL940A XT
K	Lift Arm Clearance at Maximum Lift	3,235 (10' 7")	3,840 (12' 7")
L	Dump Clearance at Maximum Lift and 45° Discharge	2,765 (9' 1")	3,370 (11' 1")
M	Reach at Maximum Lift and 45° Discharge	1,095 (3' 7")	1,090 (3' 7")
N	Dump Angle at Maximum Lift and Dump (on Stops)	48	47
O	Roll Back Angle	Ground	42
		Carry	50
P	Clearance Circle (Diameter) to Outside of Tires	10,910 (35' 10")	10,910 (35' 10")
Q	Clearance Circle (Diameter) to Inside of Tires	5,910 (19' 5")	5,910 (19' 5")
R	Width Over Tires (Unloaded)	2,450 (8')	2,450 (8')
R1	Overall Width (with bucket)	2600 (8' 6")	-
S	Tread Width	1,930 (6' 4")	1,930 (6' 4")

Unit : mm (ftin)

HL940A OPERATING SPECIFICATIONS WITH BUCKETS

Linkage Bucket Type Edge Type		General Purpose Pin On		General Purpose Hook on	High Lift Linkage Change
		Bolt-On Cutting Edges	Bolt-On Cutting Edges	Bolt-On Cutting Edges	
Capacity – Rated	m³	2.3	2.1	2.3	-
	yd³	3.0	2.7	3.0	
Capacity – Rated at 110% Fill Factor	m³	2.5	2.3	2.5	-
	yd³	3.3	3.0	3.3	
Width	mm	2,600	2,550	2,600	-
	ft/in	8' 6"	8' 4"	8' 6"	
Dump Clearance at Maximum Lift and 45° Discharge	mm	2,765	2,795	2,640	+605
	ft/in	9' 1"	9' 2"	8' 8"	+1' 12"
Reach at Maximum Lift and 45° Discharge	mm	1,095	1,065	1,220	-5
	ft/in	3' 7"	3' 6"	4'	-0.2"
Digging Depth	mm	90	90	90	+40
	ft/in	3.5"	3.5"	3.5"	+1.6"
T Shipping Length (with Bucket)	mm	7,600	7,560	7,775	+590
	ft/in	24' 11"	24' 10"	25' 6"	+1' 11"
U Overall Height with Bucket	mm	5,185	5,145	5,395	+605
	ft/in	17'	16' 11"	17' 8"	+1' 12"
V Loader Clearance Circle	mm	12,180	12,110	12,280	+570
	ft/in	40'	39' 9"	40' 3"	+1' 10"
Static Tipping Load, Straight (No Tire Deflection)	kg	10,000	10,100	9,200	-1850
	lb	22,050	22,270	20,285	-4075
Static Tipping Load, Articulated (No Tire Deflection)	kg	8,600	8,700	7,900	-1550
	lb	18,960	19,180	17,420	-3415
Breakout Force	kg	11,800	12,230	10,200	+140
	lb	26,015	26,965	22,490	+310
Operating Weight*	kg	13,400	13,360	13,675	+460
	lb	29,545	29,455	30,150	+1015

* All height and tire related dimensions are with standard 20.5 R25, ★ ★, L3 tires.

HL940A BUCKET SELECTION CHART

Standard Lift Arm – General Purpose Bucket

Type	m³ (yd³)	Material Density [ton / m³]															
		1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1	2.2	2.3	2.4	2.5
Bolt-On Cutting Edge	2.3 (3.0)	2.6 m³ (3.4 yd³)						2.2 m³ (2.9 yd³)									
Bolt-On-Teeth	2.1 (2.7)							2.4 m³ (3.1 yd³)						2.0 m³ (2.6 yd³)			
Cutting Edge (ISO Quick Coupler)	2.3 (3.0)	2.6 m³ (3.4 yd³)						2.2 m³ (2.9 yd³)									

High Lift Arm (XT) – General Purpose Bucket

Type	m³ (yd³)	Material Density [ton / m³]															
		1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1	2.2	2.3	2.4	2.5
Bolt-On Cutting Edge	2.3 (3.0)	2.6 m³ (3.4 yd³)						2.2 m³ (2.9 yd³)									
Bolt-On-Teeth	2.1 (2.7)	2.4 m³ (3.1 yd³)										2.0 m³ (2.6 yd³)					
Cutting Edge (ISO Quick Coupler)	2.3 (3.0)	2.6 m³ (3.4 yd³)					2.2 m³ (2.9 yd³)										

115% 100% 95%

ENGINE	STD	OPT
ENGINE, CUMMINS, B6.7		
3 Stage air precleaner	•	
Alternator, 95A	•	
Fuel warmer	•	
Engine oil level dipstick gauge	•	
Fuel / water separator	•	
VG (Variable Geometry Turbo)	•	
CLEAN EMISSION MODULE		
DOC, DPF and SCR	•	
Active Emission Regeneration (No Manual Regeneration Required)		
Stage V Certified Emissions	•	
EGR Free	•	
Automatic Regeneration	•	
COOLING SYSTEM		
Antifreeze	•	
Auto Reversing Fan (adjustable Time/ Interval Frequencies) w/ Manual Override	•	
Coolant Level Sight Gauge	•	
Fan guard	•	
Wide Fin Radiator	•	

POWER TRAIN	STD	OPT
TRANSMISSION		

Transmission F4/R3, computer controlled, electronic soft shift, auto-shift and kick-down features included	•	
Transmission oil sight level	•	
Wide Fin Transmission Oil Cooler	•	

AXLE	STD	OPT
Conventional (Rear)	•	
Hydraulic lock differential (Front)	•	
Limited slip differential (Front / Rear)		•

BRAKE	STD	OPT
Parking brake	•	
Service brake (Enclosed wet-disc)	•	

TIRES	STD	OPT
20.5 R25, ★ ★, L3	•	
20.5-25 16PR L3		•
20.5-25 16PR L5		•
20.5 R25, ★, XHA		•

HYDRAULIC SYSTEM	STD	OPT
Diagnostic pressure taps	•	
Hyundai Bio Hydraulic Oil (VG46)		•
Hydraulic oil level sight gauge	•	
Hydraulic Oil VG32		•
Hydraulic Oil VG46	•	
Wide Fin Hydraulic Oil Cooler	•	

HYDRAULIC CONTROL	STD	OPT
Fingertip		•
Joystick		•

ELECTRO-HYDRAULIC CONTROL	STD	OPT
Boom kickout, automatic	•	
Bucket positioner, automatic	•	
Extra piping for auxiliary function		•
Fingertip	•	
Joystick	•	
Quick coupler piping	•	
Ride control system	•	

CAB & INTERIOR	STD	OPT
ALARMS, AUDIBLE AND VISUAL		

Air filter clogging	•	
Battery voltage	•	
Brake oil pressure	•	
DEF low level	•	
Engine coolant level	•	
Engine coolant temperature	•	
Engine oil pressure	•	
Fuel level	•	
Hydraulic oil temperature	•	
Parking brake	•	
Service brake oil pressure	•	
Seat belt ON/OFF	•	
Transmission error	•	

CAB & INTERIOR	STD	OPT
ALARMS, AUDIBLE AND VISUAL		
Transmission oil temperature	•	
GAUGES		
Diesel Exhaust Fluid (DEF) level	•	
Engine coolant temperature	•	
Fuel level	•	
Horn, electric	•	
Speedometer	•	
Transmission oil temperature	•	
INDICATOR LIGHTS		
Clutch Cut Off	•	
Differential Lock	•	
Engine auto stop	•	
FNR	•	
High beam	•	
Parking brake	•	
Pilot cut off	•	
Ride control	•	
Seat belt ON/OFF	•	
Turning light	•	
LCD DISPLAY		
Clock and fault code	•	
DEF level	•	
DEF low level	•	
Engine rpm	•	
Horn, electric	•	
Job time and distance	•	
Operating hour counter	•	
Transmission gear range	•	

BATTERIES	STD	OPT
850CCA, 12V, 2PCS	•	

LIGHTING SYSTEM	STD	OPT
Brake lights(Counterweight)	•	
LED dome light	•	
2 Head lights on front tower	•	
2 Head lights (LED) on front tower		•
2 Stop and tail lights	•	
4 Turn signals	•	
2 Working lights on front roof		•
4 Working lights on front roof		•
2 Working lights on rear roof		•
4 Working lights (LED) on front roof		•
2 Working lights (LED) on rear roof		•
2 Working lights on grill	•	
2 Working lights (LED) on grill	•	

SWITCHES	STD	OPT
Battery master switch	•	
Differential Lock	•	
Emergency steering		•
FNR shifter	•	
Hazard	•	
Parking	•	
Pilot cut off	•	

SYSTEM MEMORY SETTINGS	STD	OPT
Autolube, integrated in secondary display		•
Auto position	•	
Beacon light		•
Fine modulation	•	
Main light	•	
Mirror heat	•	
Quick coupler	•	
Rear wiper	•	
Ride control	•	
Work light	•	
Work load	•	

IGNITION	STD	OPT
Key	•	
Push Start Button		•

CAB (SOUND SUPPRESSED)	STD	OPT
24V to 12V DC converter (20A)	•	
Coat hook	•	
Magazine pocket	•	
One door cab	•	
Radio / USB player	•	

CAB & INTERIOR	STD	OPT
CAB(SOUND SUPPRESSED)		
Rear view mirrors (1 Inside)	•	
Rear view mirrors (2 Outside, heated)	•	
Roller type sunshade (Front window)	•	
ROPS / FOPS CAB.	•	
Rubber floor mat	•	
Steering column, tilt and telescopic	•	
Steering wheel with knob	•	
Tinted safety glass	•	
Wrist rest	•	
DOOR		
Door and cab locks, one key	•	
Doors, service access (Locking)	•	
Doors, service access (Remote control)		•
AUTOMATIC CLIMATE CONTROL		
Air conditioner & heater	•	
Defroster	•	
Intermittent wiper and washer, front and rear	•	

SEAT	STD	OPT
3* Retractable seat belt & adjustable air suspension (Heated)	•	

PERSONAL STORAGE SPACE	STD	OPT
Console box	•	
Holder, can and cup	•	

PEDALS	STD	OPT
Accel pedal without ECO switch	•	
Dual-brake pedal		•
One accelerator pedal	•	
One brake pedal	•	

SAFETY	STD	OPT
Alarm, back-up	•	
Boom safety lock		•
Emergency steering		•
Emergency stop	•	
Fire extinguisher		•

OBJECT DETECTION	STD	OPT
AAVM - All Around View Monitoring		•
IMOD (Intelligent Moving Object Detection)		•
RADAR + Secondary Mornitor		•

OTHERS	STD	OPT
2nd Monitor		•
3 Spool MCV	•	
Air Compressor		•
Auto Engine Shut Down	•	
Auto Grease System		•
Articulation Locking Bar	•	
Heavy Counterweight	•	
Hi-Mate, Satellite		•
ISO Quick Coupler	•	
LED Beacon Lamp		•
License Plate & 10W LED Lamp		•
Lift and tie-down hooks	•	
Loader linkage, sealed	•	
Sun Shade on Rear Window of Cabin		•
Vandalism protection caplocks	•	
Wheel Chocks		•

SAFETY	STD	OPT
Handrails	•	
Ladders	•	
Platforms	•	
Steps	•	

TELEMATICS	STD	OPT
ECD (Engine Connected Diagnostics)	•	
Hi MATE	•	

GUARDS	STD	OPT
Belly-Pan Guard		•
Crankcase	•	
Fenders (Front)	•	
Fenders (Rear)		•
Transmission	•	

* Standard and optional equipment may vary. Contact your Hyundai dealer for more information. The machine may vary according to International standards.

* The photos may include attachments and optional equipment that are not available in your area.

* Materials and specifications are subject to change without advance notice.

* All imperial measurements rounded off to the nearest pound or inch.

PLEASE CONTACT

HYUNDAI

CONSTRUCTION EQUIPMENT

www.hceamericas.com
6100 Atlantic Blvd., Norcross, GA 30071
TEL (678) 823-7777 FAX (678) 823-7778

Printed in U.S.A.

1099-WL-SP 12/2020v8